

# Energy System Modelling

SS 2018, Karlsruhe Institute of Technology  
Institute of Automation and Applied Informatics

## TUTORIAL IV: ELECTRICITY MARKETS

Will be worked on in the exercise session on Tuesday, 17 July 2018.

### PROBLEM IV.1 (SHADOW PRICES OF LIMITS ON CONSUMPTION).

Suppose that the utility for the electricity consumption of an industrial company is given by

$$U(q) = 70q - 3q^2 [\text{€/h}] \quad , \quad q_{\min} = 2 \leq q \leq q_{\max} = 10,$$

where  $q$  is the demand in MW and  $q_{\min}, q_{\max}$  are the minimum and maximum demand.

Assume that the company is maximising its net surplus for a given electricity price  $\pi$ , i.e. it maximises  $\max_q [U(q) - \pi q]$ .


- If the price is  $\pi = 5 \text{ €/MWh}$ , what is the optimal demand  $q^*$ ? What is the value of the KKT multiplier  $\mu_{\max}$  for the constraint  $q \leq q_{\max} = 10$  at this optimal solution? What is the value of  $\mu_{\min}$  for  $q \geq q_{\min} = 2$ ?
- Suppose now the electricity price is  $\pi = 60 \text{ €/MWh}$ . What are the optimal demand  $q^*$ ,  $\mu_{\max}$  and  $\mu_{\min}$  now?

### PROBLEM VI.2 (ECONOMIC DISPATCH IN A SINGLE BIDDING ZONE).

Consider an electricity market with two generator types, one with variable cost  $c = 20 \text{ €/MWh}$ , capacity  $K = 300 \text{ MW}$  and a dispatch rate of  $Q_1$  [MW] and another with variable cost  $c = 50 \text{ €/MWh}$ , capacity  $K = 400 \text{ MW}$  and a dispatch rate of  $Q_2$  [MW]. The demand has utility function  $U(Q) = 8000Q - 5Q^2$  [€/h] for a consumption rate of  $Q$  [MW].

- What are the objective function and constraints required for an optimisation problem to maximise short-run social welfare in this market?
- Write down the Karush-Kuhn-Tucker (KKT) conditions for this problem.
- Determine the optimal rate of production of the generators and the value of all KKT multipliers. What is the interpretation of the respective KKT multipliers?

**PROBLEM IV.3 (EFFICIENT DISPATCH IN A TWO-BUS POWER SYSTEM).**

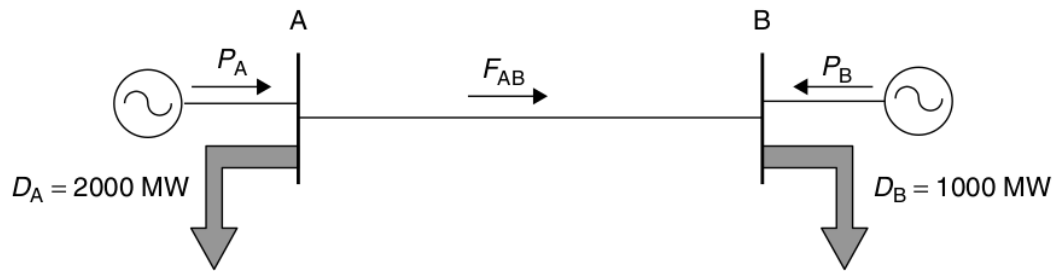

**Figure 1:** A simple two-bus power system.

Consider the two-bus power system shown in Figure 1, where the two nodes represent two markets, each with different total demand, and one generator at each node. At node A the demand is  $D_A = 2000 \text{ MW}$ , whereas at node B the demand is  $D_B = 1000 \text{ MW}$ . Furthermore, there is a transmission line with a capacity denoted by  $F_{AB}$ . The marginal cost of production of the generators connected to buses A and B are given respectively by the following expressions:

$$MC_A = 20 + 0.03P_A \quad \text{€ /MWh}$$

$$MC_B = 15 + 0.02P_B \quad \text{€ /MWh}$$

Assume that the demand  $D_*$  is constant and insensitive to price, that energy is sold at its marginal cost of production and that there are no limits on the output of the generators.

- (a) Calculate the price of electricity at each bus, the production of each generator, the flow on the line, and the value of any KKT multipliers for the following cases:
  - (i) The line between buses A and B is disconnected.
  - (ii) The line between buses A and B is in service and has an unlimited capacity.
  - (iii) The line between buses A and B is in service and has an unlimited capacity, but the maximum output of Generator B is 1500 MW.
  - (iv) The line between buses A and B is in service and has an unlimited capacity, but the maximum output of Generator A is 900 MW. The output of Generator B is unlimited.
  - (v) The line between buses A and B is in service but its capacity is limited to 600 MW. The output of the generators is unlimited.
- (b) Calculate the generator revenues, generator profits, consumer payments and consumer net surplus for all the cases considered in the above problem. Who benefits from the line connecting these two buses?
- (c) Calculate the congestion surplus for case (v). For what values of the flow on the line between buses A and B is the congestion surplus equal to zero?

**PROBLEM IV.4 (BIDDING IN AFRICA WITH PYP SA).**